
DRI Cloud Seeding Ruby Mountains Project Area

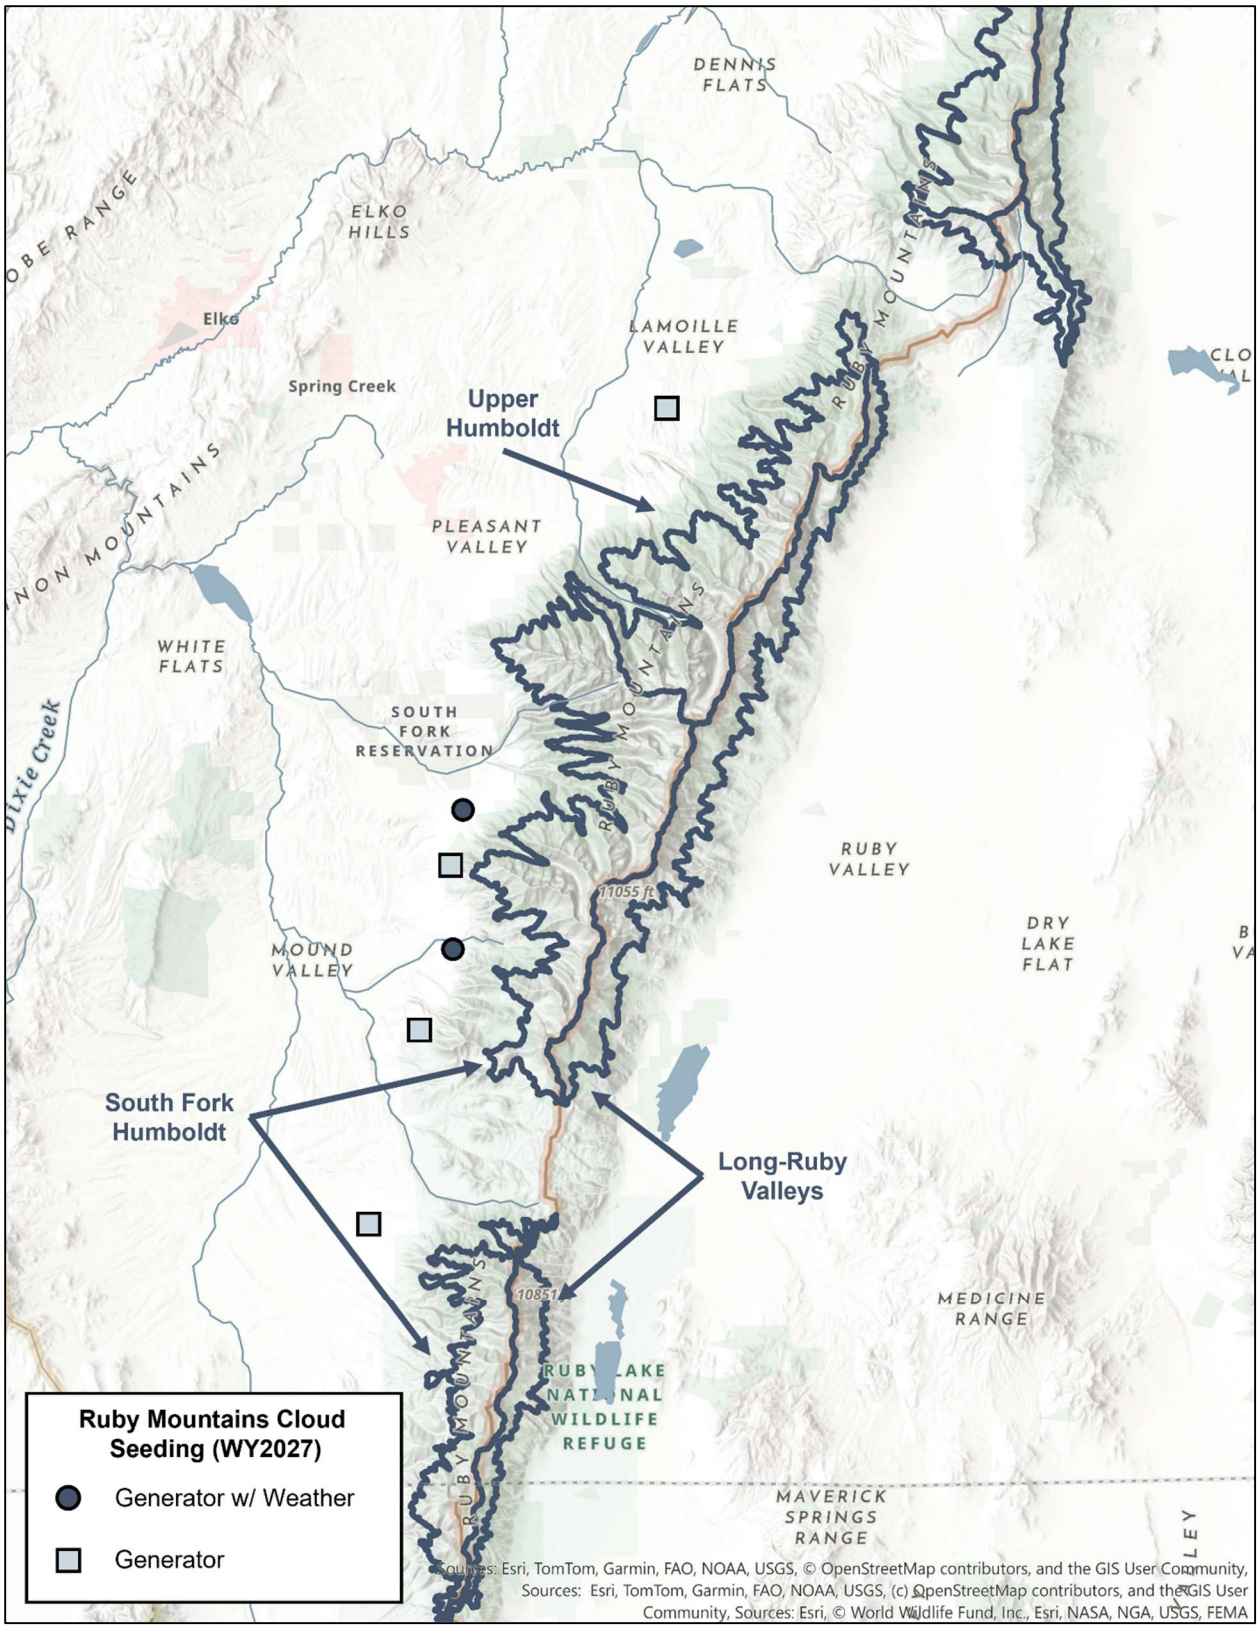

DRI Cloud Seeding Operating Criteria (link: Cloud Seeding Operations Criteria - DRI)

The following weather and cloud conditions should exist to initiate or continue cloud seeding operations in any area where DRI has a seeding project. Operations can also be initiated based on a 0-3 h forecast of these conditions existing in an operational area. Seeding suspension criteria will always override seeding operations criteria.

1. Cloudiness of sufficient areal extent to cover at least 50% of the intended target area.
2. Clouds of sufficient depth, with cloud bases at least as low as the highest mountain peaks, to provide the potential for precipitation over the target areas.
3. Wind directions that are conducive to transporting seeding material toward the target areas. This criterion will vary by area and will be verified by data from upper air soundings, NEXRAD radar wind measurements, mountain top weather stations, and wind data from instruments at seeding sites.
4. Wind speeds at or near 700 mb should not exceed 30 m s-1 (~60 kts) to ensure that adequate time is available for growth and fallout of seeded ice crystals onto the target area. Mountain top weather stations, NWS upper air soundings, and NEXRAD radars will provide verification of wind speed.
5. The existence of supercooled liquid water in clouds is a condition necessary for successful cloud seeding. This quantity is not routinely measured over all the target areas, but the observation of icing at a mountain top site, or the observation of liquid water from one of DRI's microwave radiometers will be given strong consideration in the decision to initiate a seeding operation in any area where these data are available. When available these data will also be used in postseason evaluations of seeding operations.
6. To increase the likelihood of ice crystal formation by AgI seeding aerosols from ground generators, the temperature near mountain top level should be -5°C, or colder, as verified by data from mountain top weather stations, or upper air soundings. Operations may be initiated at a temperature as warm as -3°C, provided the -5°C threshold is forecast to be met within 0 to 3 hours.

The project meteorologist is responsible for forecasting and verifying seedable conditions, and for initiating and terminating operations. Logs documenting the weather conditions during an operation will be kept on file at DRI by the meteorologist or other staff members.

DRI Suspension Criteria (link: Cloud Seeding Safety Guidelines - DRI)

In the event of any emergency which affects public welfare in the region of any seeding operations being carried on by the DRI Cloud Seeding Program, the seeding operations in that region will be suspended until the emergency conditions are no longer a threat to the public. Seeding suspensions are generally expected to occur due to one or more of the following conditions:

A) When an extreme avalanche danger exists as determined by the U.S. Forest Service, where applicable.
B) When the National Weather Service (NWS) forecasts a warm winter storm (freezing level >8000 ft.) with the possibility of considerable rain at higher elevations which might lead to local flooding.
C) When the Project Meteorologist determines that potential flood conditions may exist in or around any of the project areas, the National Weather Service Flood Forecast Services at Reno or Sacramento will be consulted about the possibility of any of the following warnings or forecasts being in effect:
    a. Flash flood warnings by the NWS.
    b. Forecasts of excessive runoff issued by the CA/NV River Forecast Center, including such forecasts for rivers on the adjoining west slope of the Sierra Nevada.
    c. Quantitative precipitation forecasts issued by the NWS that would produce excessive runoff in or around the project area.

In addition to the above, if any of the following conditions or forecasts exist; seeding operations may be suspended, at the discretion of the Project Meteorologist, in and around the areas of concern:

A) When the wind speed is 60 knots or more for over 30 minutes at the 700 mb level (~10,000 ft).
B) When wind directions lie outside of the range needed to hit the target area.
C) When the water content of the snowpack in the target area, as measured at existing snow courses or SNOTEL sites, exceeds the accumulation envelope defined by the following percentages to date of long-term averages on the same date: 175% December 1, 150% January 1-March 1, and 140% April 1-May 1.